

# IMS08 - 06(B) / 10 - 08(B)


## ■ Engineering Data

Model	Stroke (mm)	Max.Energy / Cycle(Nm) $E_T$	Max.Energy / Hour(Nm/h) $E_T C$	Effective Weight(Kg) $m_e$			Recoil Force(N)		Weight(g)
				1	2	3	Ext.	Comp.	
IMS08 - 06(B)	6	5	8,000	0.8 - 2.8	2.5 - 12.6	10 - 111	2.2	5.8	10
IMS10 - 08(B)	8	11	14,500	1.8 - 6.1	5.5 - 27	22 - 244	2.5	6.9	15.5

## ■ Dimensions

(unit : mm)

Model	Stroke	A	B	C	D	E	F	G	M	Dr
IMS08 - 06(B)	6	54	7.5	35	7	47	Ø6.8	Ø6.8	M8 X 1.0	Ø2
IMS10 - 08(B)	8	64.5	7.5	42	7	57.5	Ø7	Ø8	M10 X 1.0	Ø3

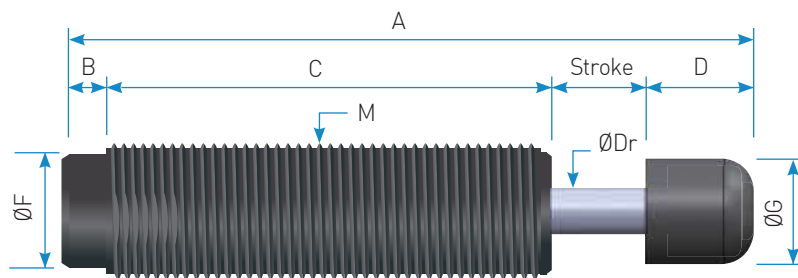

MC Nylon head

## ■ Accessories

- Two Lock Nuts included for each absorber
- Other accessories to be ordered separately

(unit : mm)

Stop Collar	Clamp Mount	Lock Nut	A1	A2	A3	A4	C1	C2	C3	C4	C5	C6	D1	D2	D3
SC08X1.0	CM08X1.0	LN08X1.0				Ø11.5	M8X1.0				M8X1.0		12	M8X1.0	3
			20	8			16	14	25	10		M4 X 16L			
SC10X1.0	CM10X1.0	LN10X1.0				Ø12.8	M10 X 1.0				M10 X 1.0		13	M10 X 1.0	4

