


Engineering Data

Model	Stroke (mm)	Max.Energy / Cycle(Nm)	Max.Energy / Hour (Nm / h)	Effective Weight(kg)	Recoil Forec(N)		Weight(g)
					Ext.	Comp.	
IAAS10 - 07(B)	7	5.5	15,000	1 - 123	2.4	5.4	21
IAAS12 - 10(B)	10	16	30,500	1.5 - 333	3.6	9.8	41

Dimensions


Model	Stroke	A	B	C	D	E	F	G	H	M	Dr
IAAS10 - 07(B)	7	68	1.2	52.8	7	61	Ø8.6	8.6	8.8	M10X1.0	Ø3
IAAS12 - 10(B)	10	84	1.2	62.8	10	74	Ø10.5	Ø10.5	-	M12X1.0	Ø4

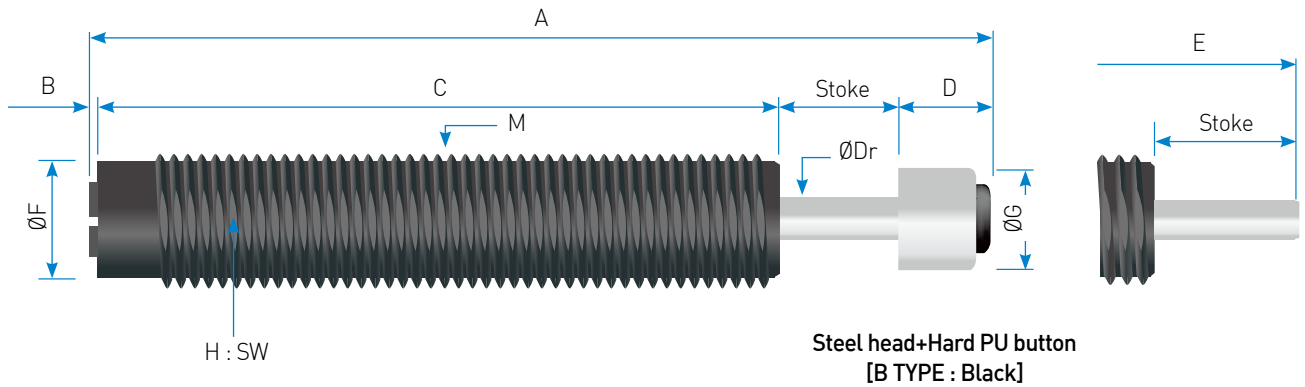


Accessories

Model	Stop Collar				Side Load Adapter					Clamp Mount						Lock Nut		
	A1	A2	A3	A4	B1	B2	B3	B4	B5	C1	C2	C3	C4	C5	C6	D1	D2	D3
IAAS10 - 07(B)	20	8	Ø12.8	M10 X 1.0	12	12.5	7	M10 X 1.0	Ø4	16	14	25	10	M10 X 1.0	M4	13	M10 X 1.0	4
IAAS12 - 10(B)	20	8	Ø13.8	M12 X 1.0	12	17.5	10	M12 X 1.0	Ø5	20	16	32	12	M12 X 1.0	M5 X 18L	14	M12 X 1.0	4


Stop Collar



Side Load Adapter



Clamp Mount

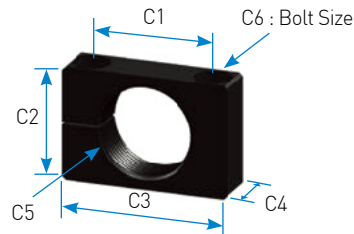

Lock Nut

